

Koland	5-6
--------	-----

.

1)

,

.

가

.

2)

가)

.

.

.

.

.

가

)

.

.


.

.

가

120 °

3)

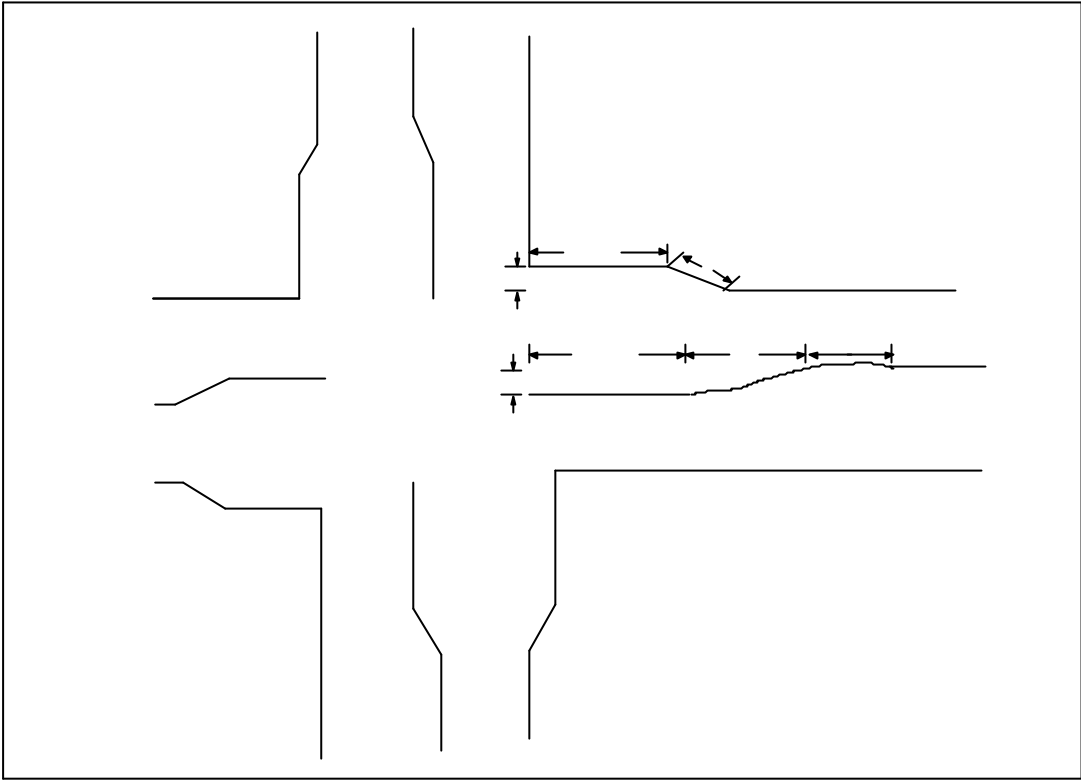

가)

(1) (m)

	3.25	3.25
	3.00	3.00
	2.75	3.00

(2) (m)

	45	45
	35 40	40 45
	20	25

(3) (m)

	25	25
	15	20
	10	15

(4) (m)

(가)

2 × 2.0

, 10m .

( )

( )

가 1/3

.

( /hr)									
	100		110		120		130		
50	15	15	15	15	15	20	15	20	
100	25	30	30	30	30	35	30	35	
150	40	45	40	45	45	50	50	55	
200	50	60	55	65	60	70	65	75	
250	60	70	70	80	75	85	80	95	
300	75	85	80	95	90	105	95	110	
350	90	105	95	110	105	120	115	130	
400	100	115	110	125	120	140	130	150	
450	110	130	120	145	135	155	145	170	
500	125	150	135	160	150	175	160	190	

)

(1)

(2) (m)

	25	25
	15	20
	10	15

(3) (m)

1/2

( /hr)									
	100		110		120		130		
50	15	15	15	15	15	20	15	20	
100	15	15	15	15	15	20	15	20	
150	20	20	20	20	20	25	25	25	
200	25	30	25	30	30	35	30	35	
250	30	35	35	40	35	40	40	45	
300	35	40	40	45	45	55	45	55	
350	45	50	45	55	55	60	55	65	
400	50	55	55	60	60	70	65	75	
450	50	65	60	70	65	75	70	85	
500	60	70	65	80	75	85	80	95	